

Product Information Sheet



Torch



HPR50
5,2V 0,85A PX13,5s

Ordering - No.
68002

Product Description

Halogen Miniature Lamp with Prefocus Base


Features

Hardglass Bulb, small Dimensions, high Shock Resistance

Applications

Flashlight

Drawing (in mm)

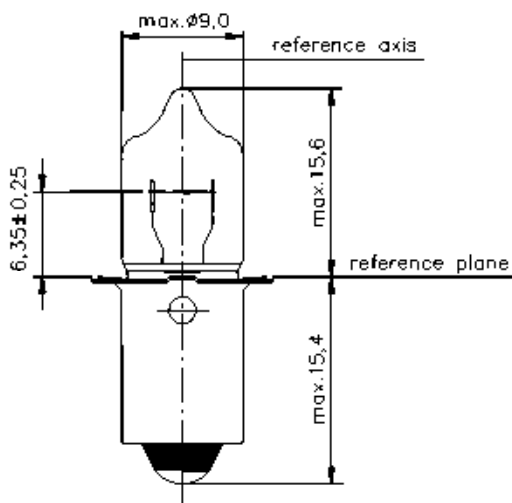

Technical Details

ANSI	HPR50
Rated Voltage (V)	5,2
Current (A)	max. 0,91
Luminous Flux (lm)	85 ± 10%
Lifetime T50 (h)	25
Base	PX13,5s
Bulb Diameter (mm)	max. 9,0
Light Center Length (mm)	6,35 ± 0,25
Bulk Package	1000 pcs.
Tenway Package	200 pcs.
Environmental Remark	Product don't contain lead or mercury and is conform with Directive 2002/95/EC "Restriction of the use of certain hazardous substances in electrical and electronic equipment".

valid from	10.12.2012—V1—PN12/0248
replace for	25.02.2000
file	9239/186/08400100.pub